

# Frequency Counters

SR625 — Frequency counter with rubidium timebase



Traunstraße 21, A-2120 Wolkersdorf  
T: +43 2245 6725 F: +43 2245 559633  
office@prager-elektronik.at  
www.prager-elektronik.at



## SR625 Time Interval & Frequency Counter

- Rubidium atomic timebase
- 2 GHz prescaler input
- 11-digit frequency resolution (1 s)
- 10 minute warm-up period
- 10 MHz Rb timebase output
- Statistical analysis & Allan variance
- Hardcopy to printers and plotters
- GPIB and RS-232 interfaces

• SR625 ... \$7,950 (U.S. list)

The SR625 Frequency Counter is a NIST traceable frequency counting standard for calibrating base stations, transmitters and many other types of communication systems. It combines the high resolution and wide variety of features found in the SR620 counter with the atomic accuracy of a rubidium timebase.

### Low Drift, High Accuracy

The SR625 Frequency Counter consists of a frequency counter (SR620), a high-accuracy rubidium timebase (PRS10), and a 2 GHz input prescaler. The combination of the SR620 and the prescaler allows direct frequency measurements up to 2 GHz, with twelve digits of resolution in a 100 s measurement.

The rubidium timebase ensures excellent short-term stability ( $<2 \times 10^{-11}$  Allan variance (1 s)) and long-term drift ( $<5 \times 10^{-11}$ /month).


### Simple, Portable Operation

The SR625's warmup time is less than ten minutes, making it ideal for field applications. An additional back-panel output provides a rubidium stabilized 10 MHz signal which can be used to drive other test equipment (e.g., synthesizers or spectrum analyzers). The standard GPIB and RS-232 interfaces allow for complete control and data acquisition from any laboratory computer. The SR625's performance makes it the standard for remote applications or laboratory calibration.

The following specifications relate to the 2.2 GHz prescaler and the rubidium timebase of the SR625. Please see the section on the SR620 for general specifications relating to the counter.

**Rubidium Timebase**

Frequency	10 MHz
Accuracy at shipment	$\pm 5 \times 10^{-11}$
One day stability	$4 \times 10^{-11}/\text{day}$
Long-term drift	$< 5 \times 10^{-11}/\text{month}, < 5 \times 10^{-10}/\text{year}$
Short-term stability	
1 s Allan variance	$< 2 \times 10^{-11}$
10 s Allan var.	$< 1 \times 10^{-11}$
100 s Allan var.	$< 2 \times 10^{-12}$
Warm-up interval	10 minutes to meet short-term stability specification
Power consumption	70 W (at warm-up), 100/120/208/240 VAC, 50/60 Hz
Output	10 MHz, 1 Vpp sine wave

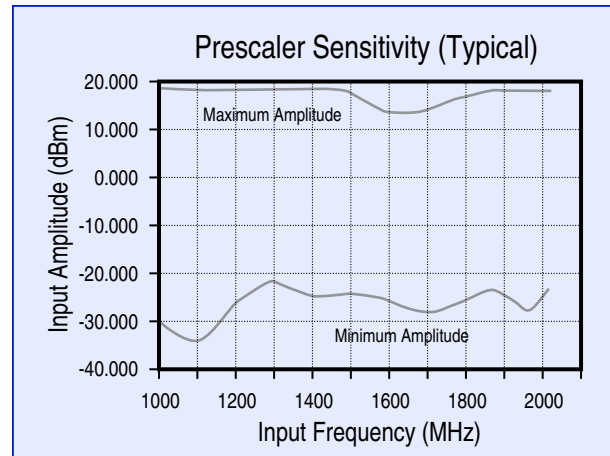

**Prescaler**

Frequency ratio	10:1
Input impedance	50 $\Omega$
Max. input level	+23 dBm
Input freq. range	50 MHz to 2.2 GHz
Input sensitivity	See graph
Output	
Output load	50 $\Omega$
Output amplitude	700 mVpp square wave
Output offset	500 mV

**Ordering Information**

SR625	Frequency counter with Rb. timebase	\$7,950
-------	-------------------------------------	---------

**General**

Size	17" x 3" x 14.5" (WHD)
Weight	15 lbs.
Warranty	One year parts and labor on defects in materials and workmanship



SR625 rear panel